


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 51.61 lm/W
MODEL		I _{max} (cd)	626.3	S/MH(C0/180)	0.62	
NOMINAL POWER(W)	7	LOR(%)	43.0	S/MH(C90/270)	0.71	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	361.30	η UP,DN(C0-180)	0.0,23.2	
NOMINAL FLUX(lm)	840	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,19.8	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	24	η down(%)	43.0	CIBSE SHR MAX	0.70	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

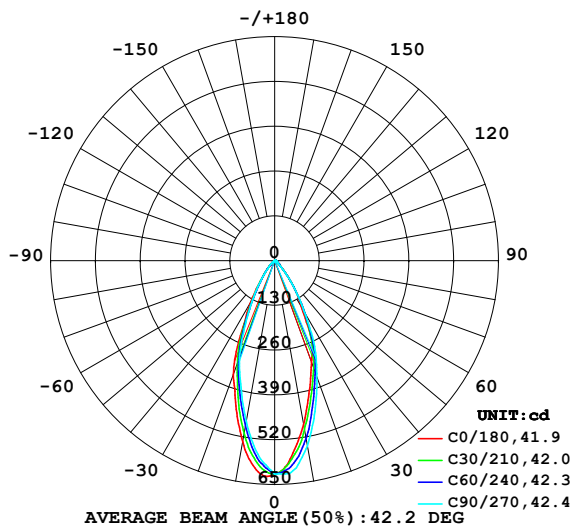

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

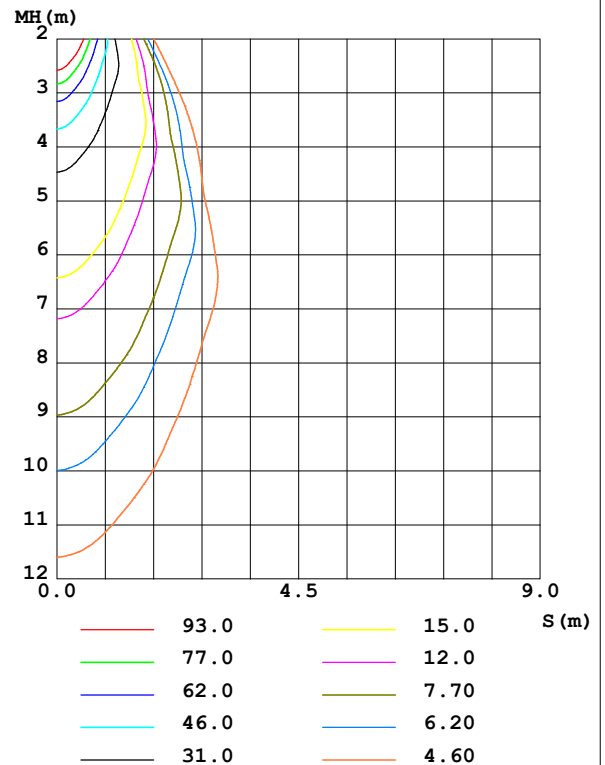

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature:25.3℃
Operators:
Test Date:

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:10.720m [K=0.9328]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	484.1	512.4	546.9	552.1	534.6	499.4	475.3	465.8	0- 10	53.40	53.40	14.8,6.36
20	314.4	342.7	358.2	358.0	351.2	309.7	300.3	297.3	10- 20	114.9	168.3	46.6,20
30	156.8	172.1	173.1	161.8	140.4	120.8	121.3	140.4	20- 30	107.5	275.8	76.3,32.8
40	58.02	50.90	55.72	48.36	38.64	38.07	33.12	42.27	30- 40	55.79	331.5	91.8,39.5
50	15.23	15.52	12.42	10.70	12.18	8.462	9.098	10.65	40- 50	19.39	350.9	97.1,41.8
60	5.643	4.425	4.208	4.078	4.456	2.923	2.533	3.015	50- 60	6.164	357.1	98.8,42.5
70	2.470	2.078	2.052	1.895	2.855	1.174	1.096	1.196	60- 70	2.609	359.7	99.6,42.8
80	0.9911	0.9124	0.9130	0.7912	1.930	0.3677	0.3692	0.4453	70- 80	1.224	360.9	99.9,43
90	0.2858	0	0	0	0.5247	0	0	0	80- 90	0.3634	361.3	100,43
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 343.95 lm

%lum = 95.2%

%lamp = 40.9%

Conical surface Flux(120deg): 357.1 lm

%lum = 98.8%


%lamp = 42.5%

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: MEDIUM
 Temperature:25.3°C
 Operators:
 Test Date:

V(B) Range:-85 - 85DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
 Humidity:65.0%
 Test Distance:10.720m [K=0.9328]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

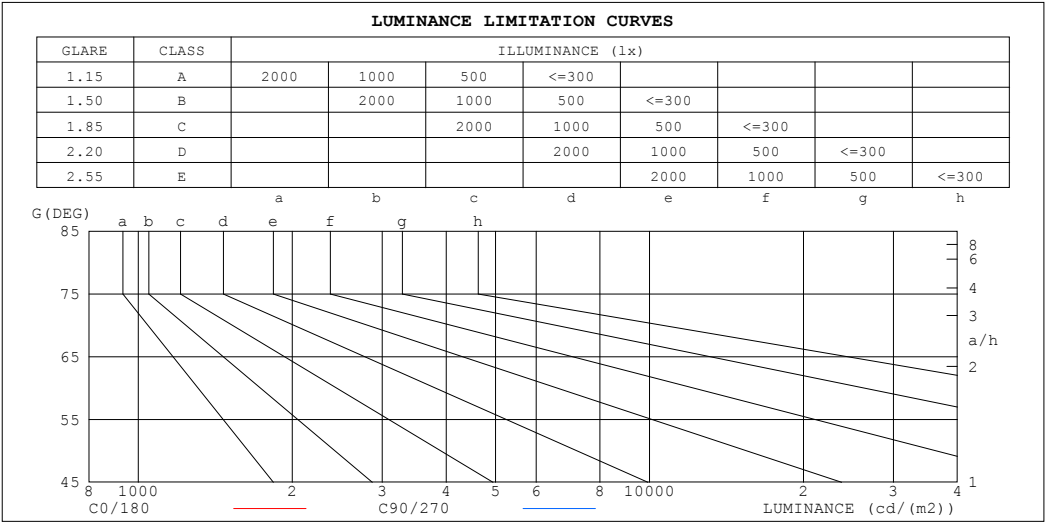

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	63	35
80	57	53
75	61	53
70	72	60
65	88	69
60	113	84
55	154	120
50	237	193
45	428	390

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: MEDIUM

Temperature:25.3℃

Operators:

Test Date:

V(B) Range:-85 - 85DEG

V(B) Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265

Humidity:65.0%


Test Distance:10.720m [K=0.9328]

Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.51	.51	.51	.50	.50	.50	.48	.48	.48	.46	.46	.46	.44	.44	.44	.43
1.0	.48	.47	.46	.47	.46	.45	.45	.44	.44	.43	.43	.42	.42	.42	.41	.40
2.0	.45	.43	.41	.44	.42	.41	.42	.41	.40	.41	.40	.39	.40	.39	.38	.38
3.0	.42	.40	.38	.41	.39	.38	.40	.38	.37	.39	.38	.37	.38	.37	.36	.35
4.0	.39	.37	.35	.39	.37	.35	.38	.36	.35	.37	.35	.34	.36	.35	.34	.33
5.0	.37	.34	.33	.36	.34	.33	.36	.34	.32	.35	.33	.32	.34	.33	.32	.31
6.0	.35	.32	.31	.34	.32	.31	.34	.32	.30	.33	.31	.30	.33	.31	.30	.29
7.0	.33	.30	.29	.33	.30	.29	.32	.30	.29	.32	.30	.28	.31	.29	.28	.28
8.0	.31	.29	.27	.31	.29	.27	.31	.28	.27	.30	.28	.27	.30	.28	.27	.26
9.0	.30	.27	.26	.29	.27	.26	.29	.27	.26	.29	.27	.25	.28	.27	.25	.25
10.0	.28	.26	.24	.28	.26	.24	.28	.26	.24	.27	.25	.24	.27	.25	.24	.24

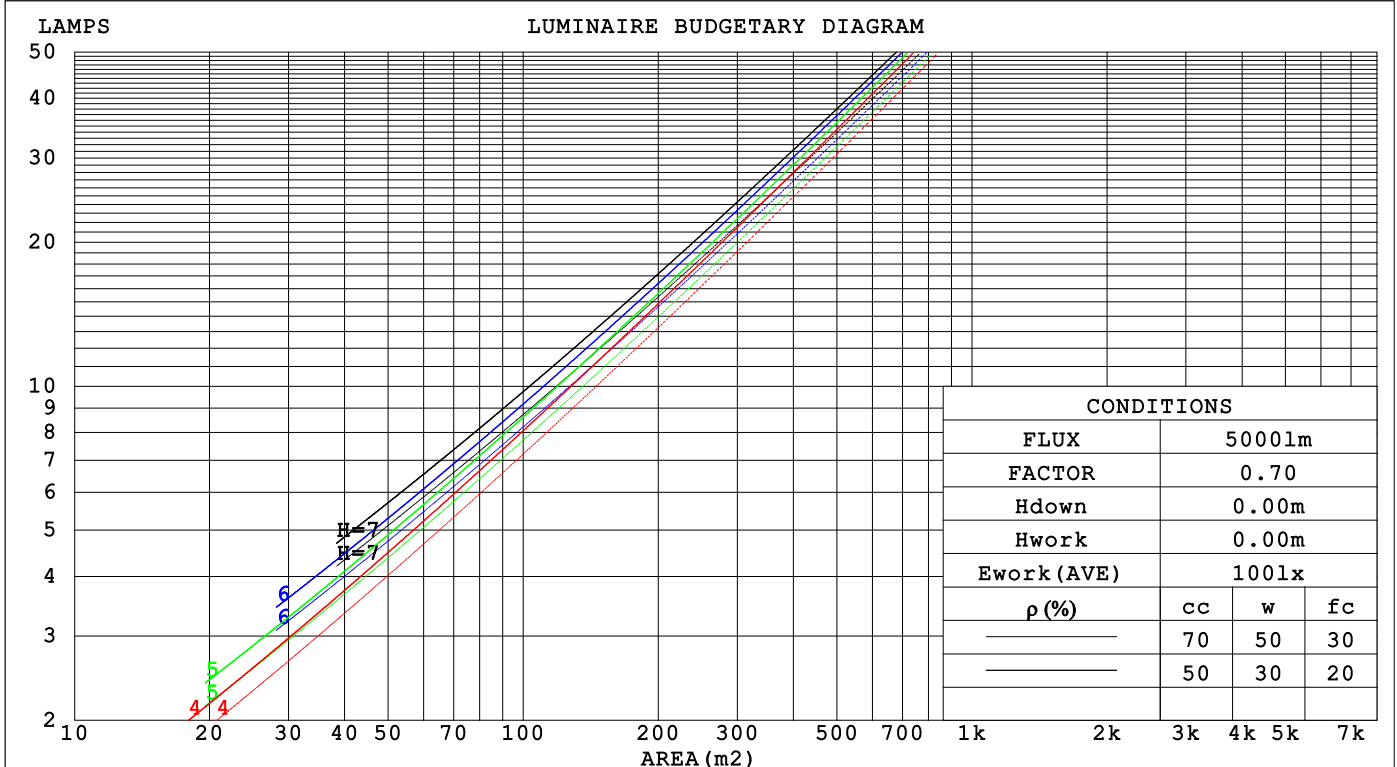

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:
Test Date:

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:10.720m [K=0.9328]
Remarks:

WEC AND CCEC

NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.075 .043 .013	.072 .041 .013	.067 .038 .012	.062 .035 .011	.057 .033 .011	
2.0	.071 .039 .012	.069 .038 .012	.064 .036 .011	.060 .034 .011	.056 .032 .010	
3.0	.068 .036 .011	.065 .035 .011	.062 .033 .010	.058 .032 .010	.055 .030 .009	
4.0	.064 .033 .010	.062 .033 .010	.059 .031 .009	.056 .030 .009	.053 .029 .009	
5.0	.061 .031 .009	.059 .030 .009	.057 .029 .009	.054 .028 .008	.051 .027 .008	
6.0	.058 .029 .008	.057 .029 .008	.054 .028 .008	.052 .027 .008	.050 .026 .008	
7.0	.055 .027 .008	.054 .027 .008	.052 .026 .008	.050 .026 .007	.048 .025 .007	
8.0	.053 .026 .007	.052 .026 .007	.050 .025 .007	.048 .024 .007	.046 .024 .007	
9.0	.051 .024 .007	.050 .024 .007	.048 .024 .007	.046 .023 .007	.045 .023 .007	
10.0	.049 .023 .006	.048 .023 .006	.046 .023 .006	.045 .022 .006	.043 .022 .006	

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.082 .082 .082	.070 .070 .070	.048 .048 .048	.027 .027 .027	.009 .009 .009	
1.0	.074 .068 .062	.063 .058 .054	.043 .040 .037	.025 .023 .022	.008 .007 .007	
2.0	.067 .057 .049	.057 .049 .042	.039 .034 .029	.023 .020 .017	.007 .006 .006	
3.0	.061 .049 .039	.053 .042 .034	.036 .029 .024	.021 .017 .014	.007 .006 .005	
4.0	.057 .042 .031	.049 .037 .027	.034 .026 .019	.019 .015 .011	.006 .005 .004	
5.0	.053 .037 .026	.046 .032 .023	.031 .023 .016	.018 .013 .009	.006 .004 .003	
6.0	.050 .033 .022	.043 .029 .019	.029 .020 .013	.017 .012 .008	.006 .004 .003	
7.0	.047 .030 .018	.040 .026 .016	.028 .018 .011	.016 .011 .007	.005 .004 .002	
8.0	.044 .027 .016	.038 .024 .014	.026 .017 .010	.015 .010 .006	.005 .003 .002	
9.0	.042 .025 .014	.036 .022 .012	.025 .015 .008	.015 .009 .005	.005 .003 .002	
10.0	.040 .023 .012	.035 .020 .010	.024 .014 .007	.014 .008 .004	.005 .003 .001	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:
Test Date:

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:10.720m [K=0.9328]
Remarks:

UGR(Unified Glare Rating) Table

NAME: BL7066-LV-C7-3-45					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.5	6.4	5.8	6.6	6.8	5.5	6.4	5.7	6.5	6.7				
3H	5.5	6.3	5.8	6.5	6.7	5.4	6.2	5.7	6.4	6.6				
4H	5.5	6.3	5.8	6.5	6.7	5.4	6.2	5.6	6.4	6.6				
6H	5.4	6.2	5.7	6.4	6.7	5.3	6.1	5.6	6.3	6.6				
8H	5.4	6.1	5.7	6.4	6.7	5.3	6.0	5.6	6.3	6.5				
12H	5.4	6.1	5.7	6.4	6.6	5.3	6.0	5.6	6.2	6.5				
4H 2H	5.4	6.1	5.6	6.4	6.6	5.3	6.1	5.6	6.3	6.5				
3H	5.4	6.0	5.7	6.3	6.6	5.3	5.9	5.6	6.2	6.5				
4H	5.3	6.0	5.7	6.3	6.6	5.2	5.9	5.6	6.2	6.5				
6H	5.3	5.9	5.7	6.2	6.6	5.2	5.8	5.6	6.1	6.5				
8H	5.3	5.8	5.7	6.2	6.6	5.2	5.7	5.6	6.1	6.4				
12H	5.3	5.8	5.7	6.2	6.6	5.2	5.7	5.6	6.0	6.4				
8H 4H	5.2	5.8	5.6	6.1	6.5	5.1	5.6	5.5	6.0	6.4				
6H	5.3	5.7	5.7	6.1	6.5	5.2	5.6	5.6	6.0	6.4				
8H	5.3	5.6	5.7	6.1	6.5	5.2	5.5	5.6	5.9	6.4				
12H	5.3	5.6	5.8	6.1	6.5	5.2	5.5	5.6	5.9	6.4				
12H 4H	5.2	5.7	5.6	6.0	6.4	5.1	5.6	5.5	5.9	6.3				
6H	5.2	5.6	5.7	6.0	6.5	5.1	5.5	5.6	5.9	6.3				
8H	5.2	5.6	5.7	6.0	6.5	5.1	5.5	5.6	5.9	6.4				
Variations with the observer position at spacings(CIE Pub.117):														
S = 1.0H	+ 2.5 / - 4.7					+ 2.4 / - 5.4								
1.5H	+ 4.1 / - 4.1					+ 4.2 / - 4.5								
2.0H	+ 4.2 / - 3.1					+ 4.3 / - 2.8								

CIE Pub.117, 840.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.6)
Area: 0.1 m2

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:
Test Date:

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:10.720m [K=0.9328]
Remarks:

UTILIZATION FACTORS TABLE

NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	37	34	33	37	34	33	37	34	33	31
0.80	40	38	36	40	38	36	40	37	36	34
1.00	42	40	38	42	40	38	41	40	38	36
1.25	44	42	40	44	42	40	43	41	40	38
1.50	45	43	42	45	43	42	44	42	41	39
2.00	47	45	43	46	44	43	45	43	42	40
2.50	47	46	44	47	45	44	45	44	43	41
3.00	48	46	45	47	46	45	46	45	44	41
4.00	49	48	47	48	47	46	46	46	45	42
5.00	49	48	48	48	48	47	47	46	46	42
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 0.5DEG
 Test Speed: MEDIUM
 Temperature:25.3°C
 Operators:
 Test Date:

$V(B)$ Range:-85 - 85DEG
 $V(B)$ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
 Humidity:65.0%
 Test Distance:10.720m [K=0.9328]
 Remarks:

ISOCANDELA DIAGRAM

NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

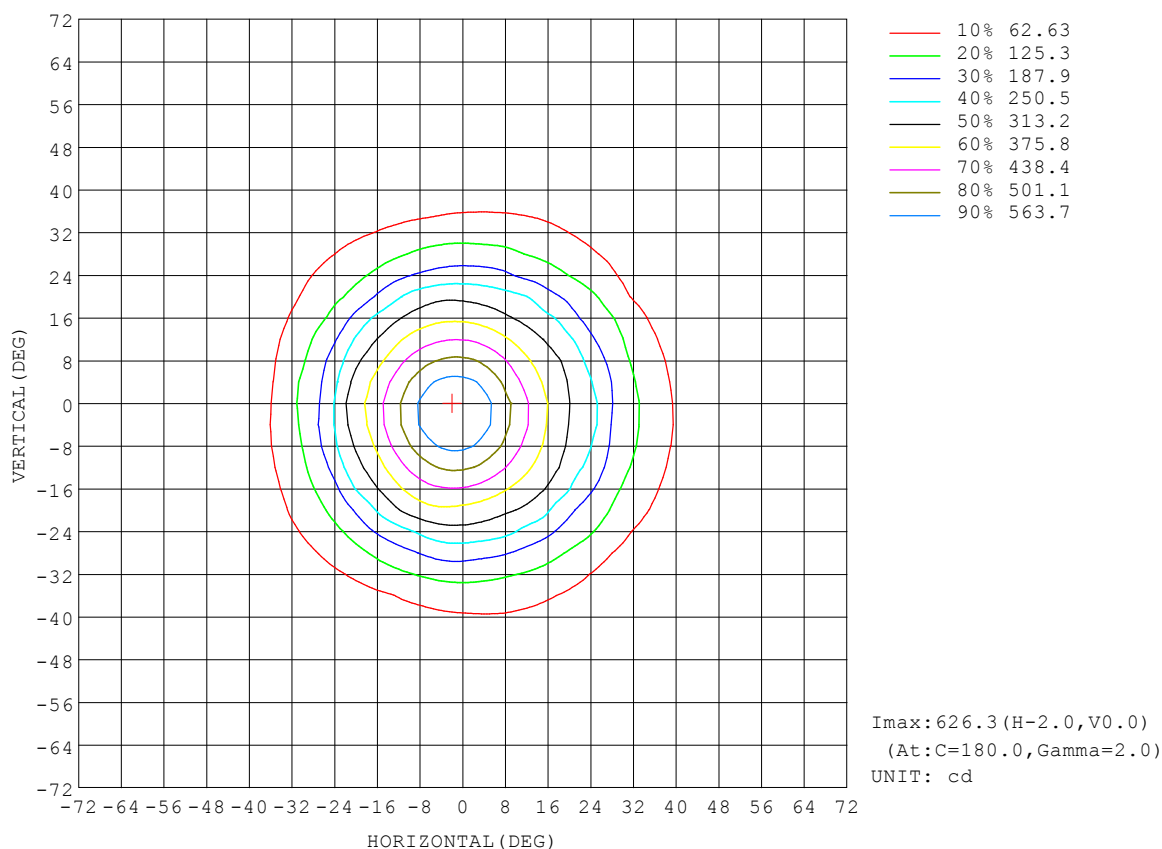


H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature: 25.3°C
Operators:
Test Date:

V(B) Range: -85 - 85DEG
V(B) Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity: 65.0%
Test Distance: 10.720m [K=0.9328]
Remarks:

AAI Figure

NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

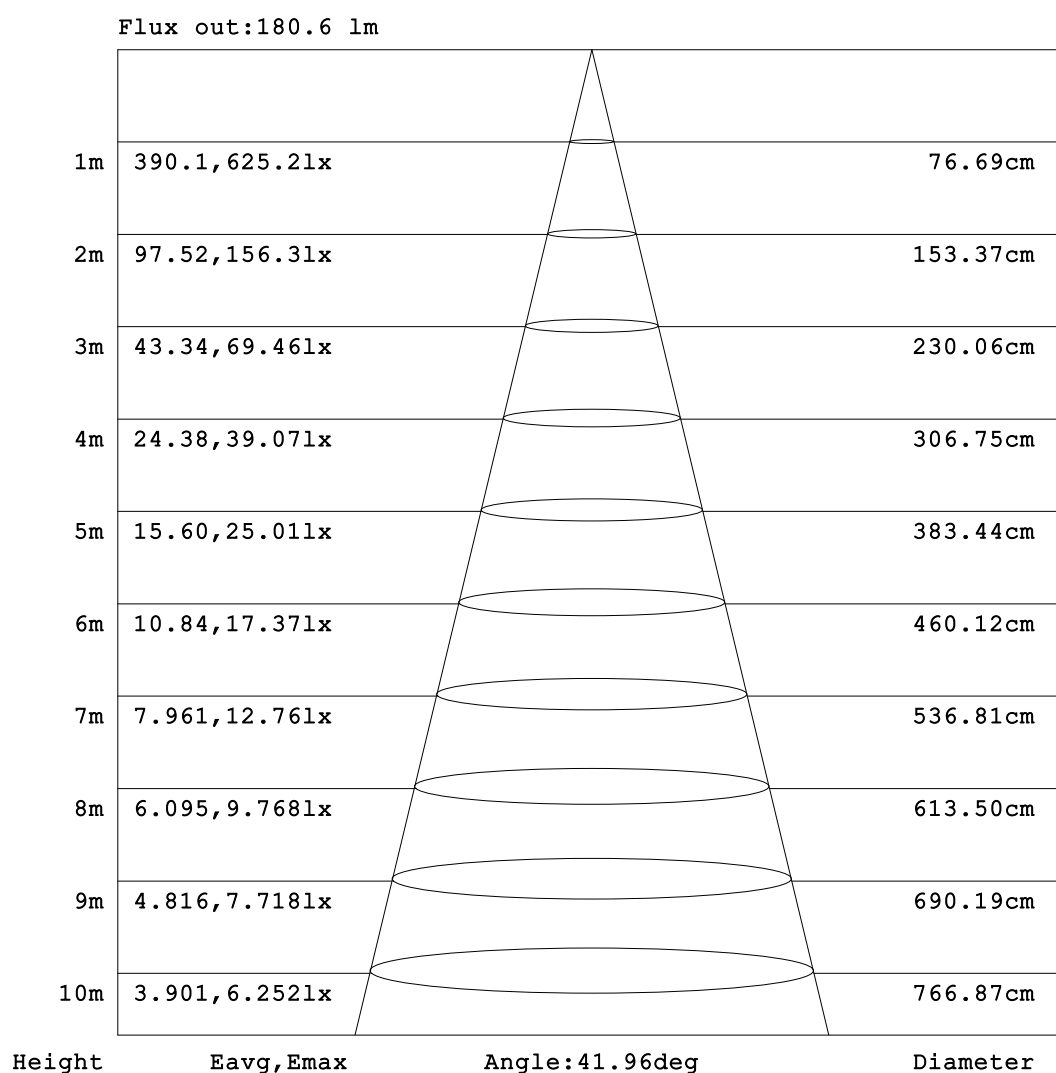


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:
Test Date:

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:10.720m [K=0.9328]
Remarks:

ISOLUX DIAGRAM

NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

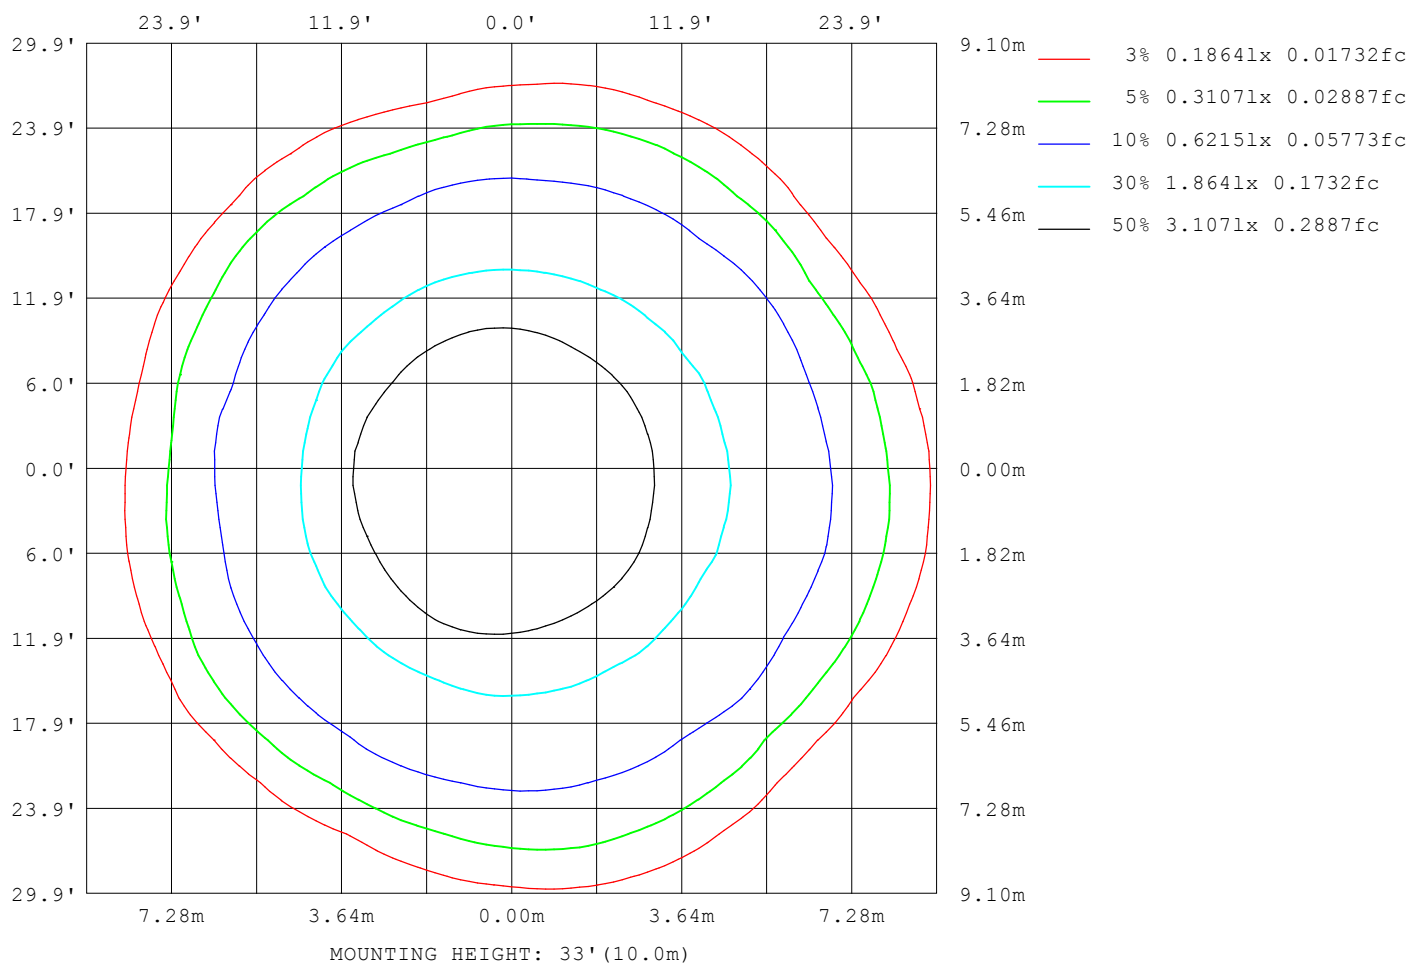

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:
Test Date:

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:10.720m [K=0.9328]
Remarks:

LED Avg.L Report

NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	86
L_0~180 (75) av	75
L_0~180 (85) av	124
L_90~270 (65) av	55
L_90~270 (75) av	39
L_90~270 (85) av	24
L_45 (65) av	56
L_45 (75) av	39
L_45 (85) av	40

Standard: GB/T 29293-2012

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature:25.3℃
Operators:
Test Date:

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:10.720m [K=0.9328]
Remarks:

Planar Illuminance Curve

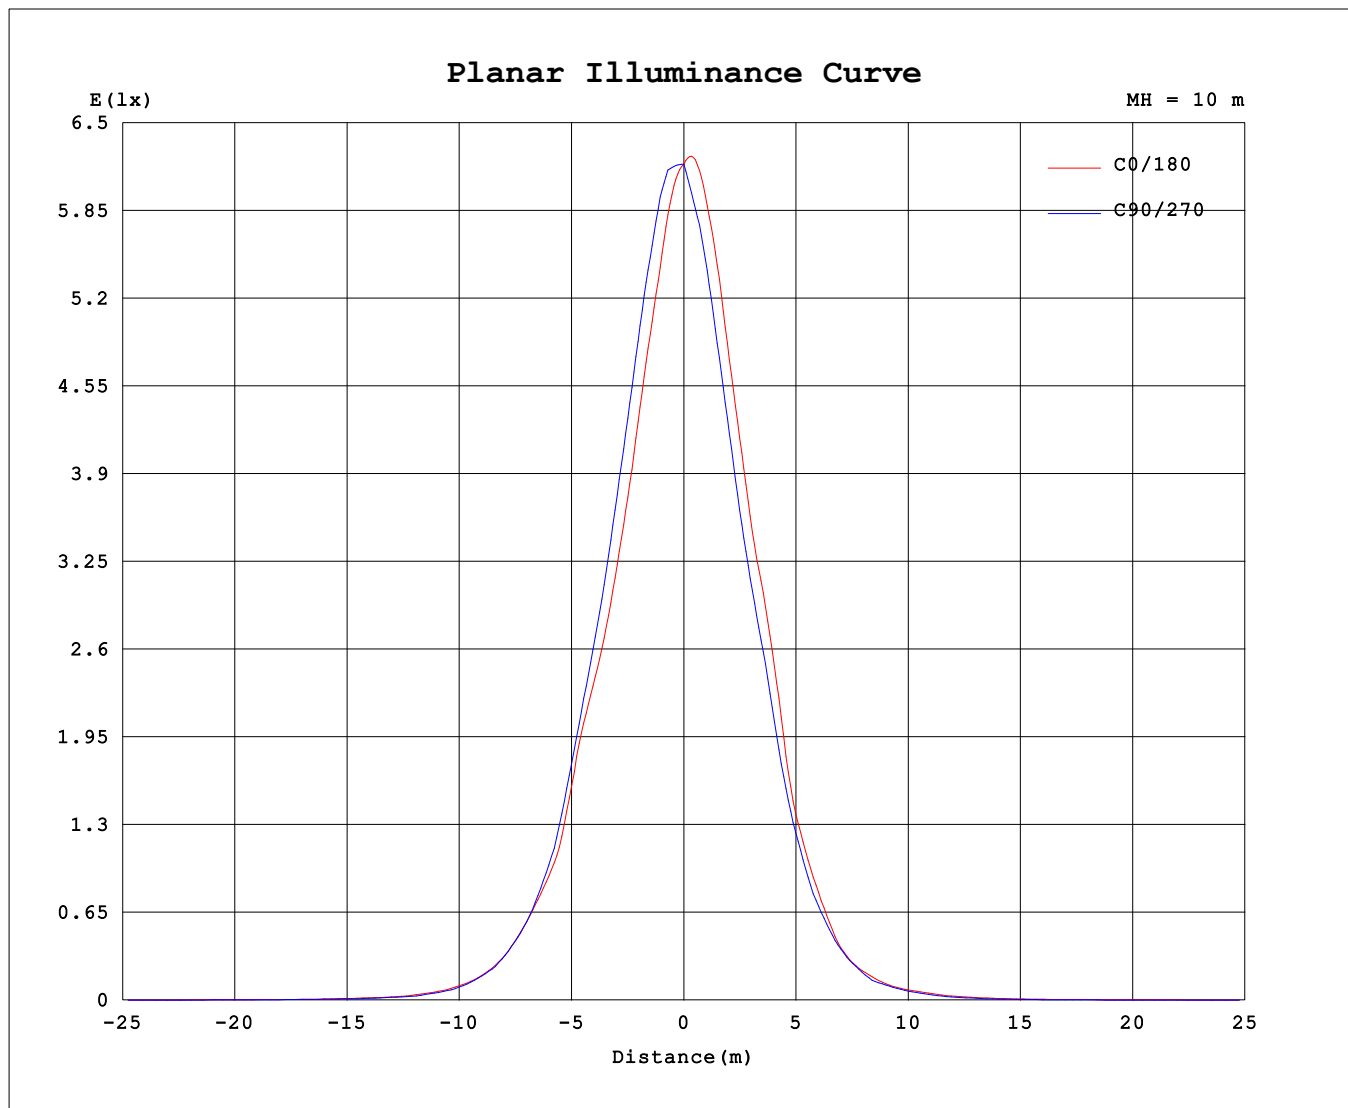

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:
Test Date:

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:10.720m [K=0.9328]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

[illegible]

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:
Test Date:

```
V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:10.720m [K=0.9328]
Remarks:
```

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

[illegible]

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:
Test Date:

```
V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:10.720m [K=0.9328]
Remarks:
```

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--3

UNIT: cd

[illegible]

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:
Test Date:

```
V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:10.720m [K=0.9328]
Remarks:
```

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: BL7066-LV-C7-3-45	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--4

UNIT: cd

[illegible]

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:
Test Date:

```
V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:10.720m [K=0.9328]
Remarks:
```