




BL7158 LED 3W

Applications

LED mini-accent light with multiple beam patterns and retractable shrouds, 360° rotatable and 180° tiltable, ideally suited for highlighting small objects or small target surfaces. Diminutive dimensions and choices of mounting accessories allow unobtrusive placement on wall surfaces, lawns and trees.

Dimensions

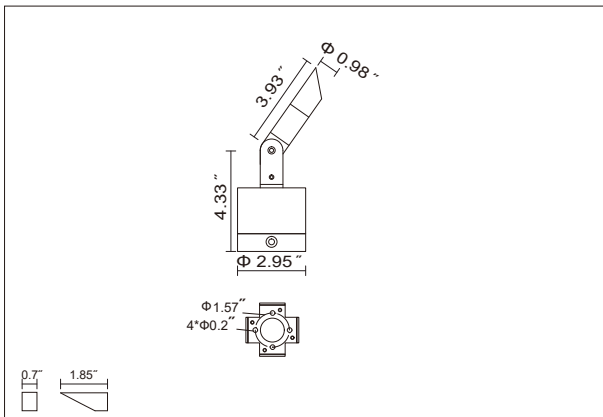

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~277V/AC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications



Options and Accessories

Shroud



No shroud



Angled shroud

Housing Color



Black RAL9011



White RAL9016



Gray RAL7012



Mineral bronze



Silver RAL9006

Mounting



Tree strap



Ground Stake



Ground Mount
(standard)



Wall Mount
(standard)



Ground stake

Ordering Guide:

Example: BL7158 - C3 - 4 - 15 - AS - B - S

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Shroud	6 Housing Color	7 Accessory
BL7158	C3: LED 3W ≤110lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 25: 25° 30: 30° 3515: H35°xV15° With NS only	NS: No shroud AS: Angled shroud	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	S: Ground Stake P: Tree strap M: Marine ambient corrosion resistance