




BL7069 LED 20W, 30W, 40W

Applications

LED accent light with multiple beam patterns and retractable shrouds, 360° rotatable and 180° tiltable, ideally suited for accent lighting. Miniature size, unobtrusive appearance. NPT 0.5" stem with choices of mounting accessories allow installation on hard surfaces, lawns and trees.

Dimensions

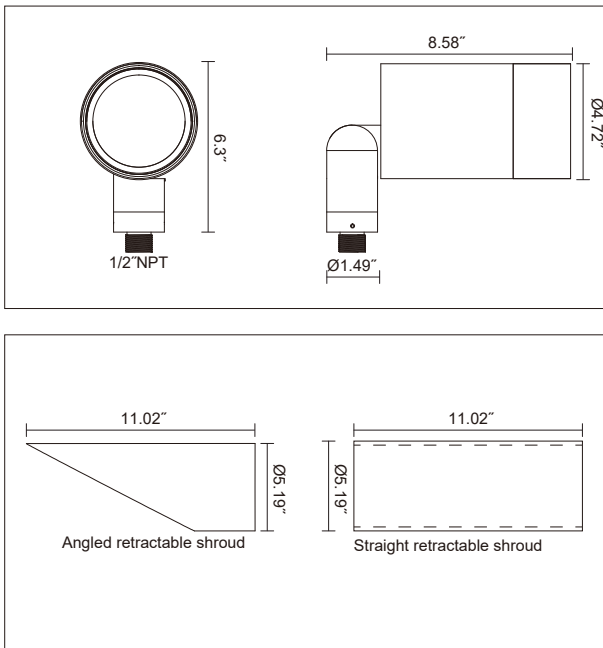

Ordering Guide:

Example: BL7069 - C20 - 4 - 15 - NS - B - S

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Shroud	6 Housing Color	7 Accessory
BL7069	C20: COB 20W ≤2161lm@3K C30: COB 30W ≤2936lm@3K C40: COB 40W ≤3958lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 24: 24° 36: 36° 50: 50° 5020: H50°xV20° With NS only	NS: No shroud AS: Angled retractable shroud SS: Straight retractable shroud	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	J: Junction Box S: Ground stake M: Marine ambient corrosion resistance PC: Pole clamp for one or two fixtures H: Honeycomb Louver KC: Mounting bracket C DMG: 0-10V Dimming RS: Retractable stem

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	120-277V/AC
Ambient Temperature	-20°C~45°C
Ingress Protection	IP65

Certifications



Options and Accessories

Shroud	 No shroud  Angled retractable shroud  Straight retractable shroud
Housing Color	 Black RAL9011  White RAL9016  Gray RAL7012  Mineral bronze  Silver RAL9006
Glareshield	 Honeycomb Louver
Mounting	See p. 12