




BL7158-LV LED 3W

Applications

Low voltage LED mini-accent light with multiple beam patterns and retractable shrouds, 360° rotatable and 180° tiltable, ideally suited for highlighting small objects or small target surfaces. NPT 0.5" stem connects to (existing) 12V/AC junction box or optional mounting brackets. 24V/DC input voltage available for remote driver.

Dimensions

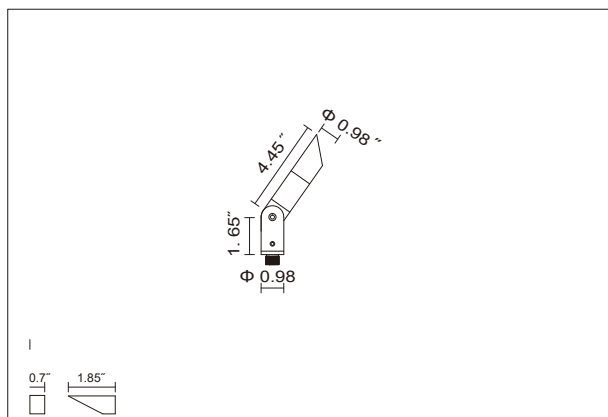

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	12V/AC, 24V/DC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications	Not ETL Listed
----------------	----------------

Options and Accessories

Shroud



No shroud



Angled retractable shroud

Housing Color



Black RAL9011



White RAL9016



Gray RAL7012



Mineral bronze



Silver RAL9006

Mounting



Tree strap



Ground stake
for junction box



Junction Box



Mounting
bracket A



Mounting
bracket B



Mounting
bracket C

Ordering Guide:

Example: BL7158 - C3 - 4 - 15 - 12 - AS - B - S

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Input Voltage	6 Shroud	7 Housing Color	8 Accessory
BL7158-LV	C3: LED 3W ≤110lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 25: 25° 30: 30° 3515: H35°xV15° With NS only	12: 12V/AC 24: 24V/DC	NS: No shroud AS: Angled retractable shroud	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	KA: Mounting bracket A KB: Mounting bracket B KC: Mounting bracket C J: Junction Box R: Remote driver S: Ground stake P: Tree strap M: Marine ambient corrosion resistance