




## BL7016 LED 4W, 8W

### Applications

LED accent light with multiple beam patterns and retractable shrouds, 360° rotatable and 180° tiltable, ideally suited for accent lighting. Miniature size, unobtrusive appearance. NPT 0.5" stem with choices of mounting accessories allow installation on hard surfaces, lawns and trees. TRIAC dimming standard.

### Dimensions

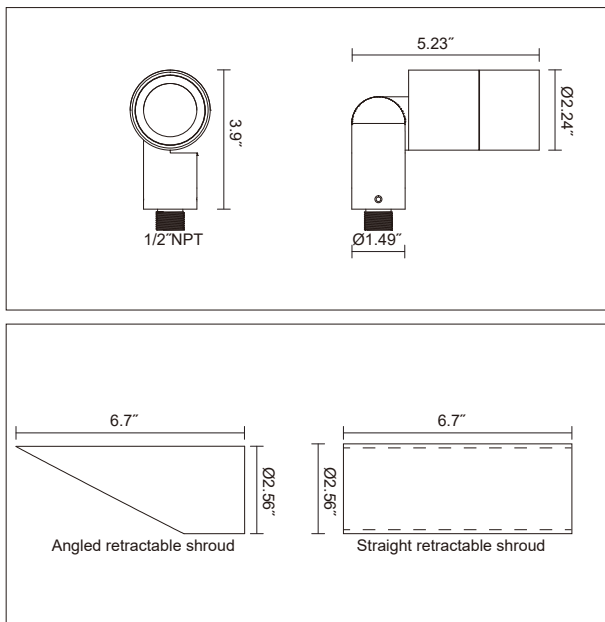

### Specifications

|                     |                                          |
|---------------------|------------------------------------------|
| Housing             | Die-cast aluminum                        |
| Gasket              | Silicone rubber                          |
| Front Cover         | Tempered Glass                           |
| LED Optic           | Polycarbonate Lens                       |
| Surface Finish      | AkzoNobel powder coating                 |
| Driver Type         | Constant current, TRIAC dimming standard |
| LED CRI             | 80                                       |
| Input Voltage       | 120V/AC                                  |
| Ambient Temperature | -40°C~45°C                               |
| Ingress Protection  | IP65                                     |

### Certifications



### Options and Accessories

#### Shroud



No shroud



Angled retractable shroud



Straight retractable shroud

#### Housing Color



Black RAL9011



White RAL9016



Gray RAL7012



Mineral bronze



Silver RAL9006

#### Glareshield



Honeycomb Louver

#### Mounting

See p. 12

### Ordering Guide:

Example: BL7016 - C4 - 3 - 20 - NS - B - S

| 1<br>Series | 2<br>Power<br>Luminaire Output | 3<br>CCT                          | 4<br>Beam Angle                                                             | 5<br>Shroud                                                                       | 6<br>Housing Color                                                                                | 7<br>Accessory                                                                                                                                                                                                                                                       |
|-------------|--------------------------------|-----------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BL7016      | C4: COB 4W<br>C8: COB 8W       | 27: 2700K<br>3: 3000K<br>4: 4000K | 20: 20°<br>35: 35°<br>45: 45°<br>55: 55°<br>4020: H40°xV20°<br>With NS only | NS: No shroud<br>AS: Angled retractable shroud<br>SS: Straight retractable shroud | B: Black RAL9011<br>W: White RAL9016<br>G: Gray RAL7012<br>Z: Mineral bronze<br>S: Silver RAL9006 | KA: Mounting bracket A<br>KB: Mounting bracket B<br>KC: Mounting bracket C<br>J: Junction Box<br>S: Ground Stake<br>P: Tree strap<br>H: Honeycomb Louver<br>M: Marine ambient corrosion resistance<br>PC: Pole clamp for one or two fixtures<br>RS: Retractable stem |