




BL7169 LED 6W

Applications

LED mini-accent light with multiple beam patterns and retractable shrouds, twin heads each 360° rotatable and 180° tiltable, ideally suited for highlighting small objects or small target surfaces. Mounting bracket extends fixture setback to enable broader coverage of target vertical surface and supports two fixtures, aiming of each independently adjustable.

Dimensions

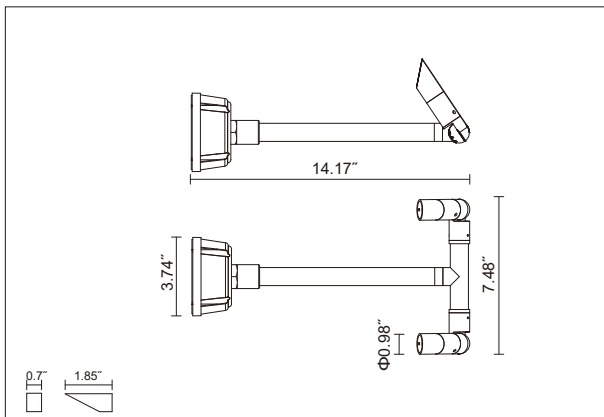

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~277V/AC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications



Options and Accessories

Shroud



No shroud



Angled retractable shroud

Housing Color



Black RAL9011



White RAL9016



Gray RAL7012



Mineral bronze



Silver RAL9006

Mounting



Tree strap



Ground Stake

Ordering Guide:

Example: BL7169 - G6 - 4 - 15 - 80 - AS - B - S

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Shroud	6 Housing Color	7 Accessory
BL7169	C6: LED 3W x2 ≤220lm@3K	27:2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 25: 25° 30: 30° 3515: H35°xV15° With NS only	NS: No shroud AS: Angled retractable shroud	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	S: Ground Stake P: Tree strap M: Marine ambient corrosion resistance