


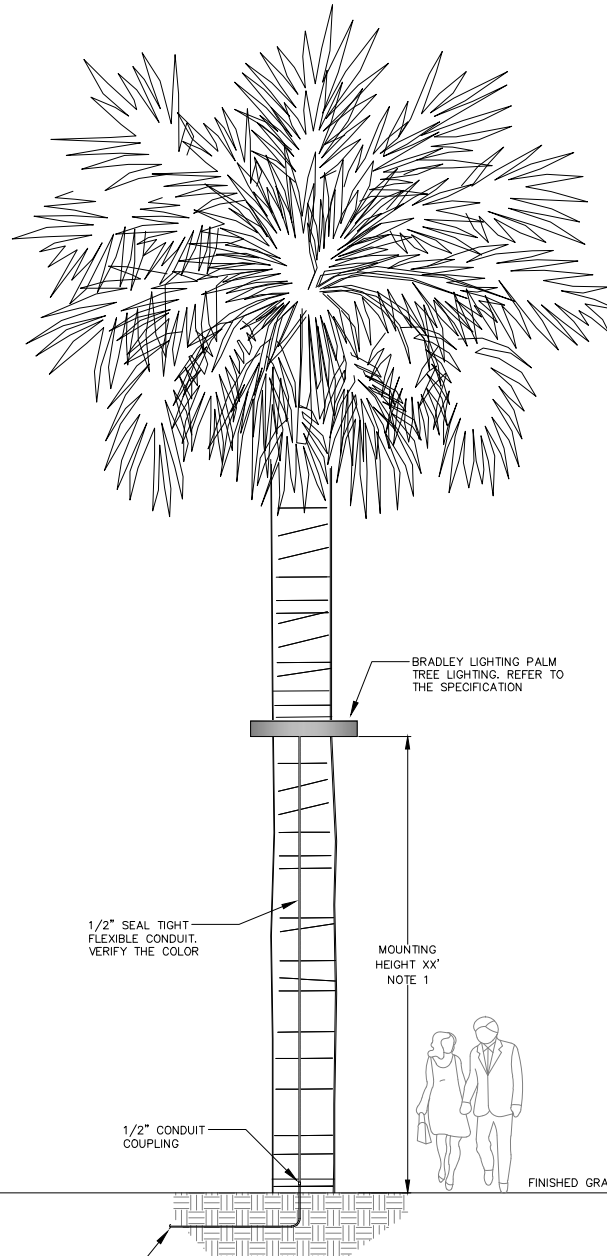

NOTES:

1. REFER TO THE FIXTURE SPECIFICATION FOR THE MOUNTING HEIGHT UNLESS NOTED.
2. INSTALL SEAL TIGHT FLEXIBAL FROM THE POWER SOURCE DIRECTLY TO THE JUNCTION/DRIVER BOX MOUNTED ON THE INSIDE OF THE FIXTURE FRAME.
3. ALL PALM TREE LIGHTING FIXTURES SHALL BE HIDDEN BEHIND THE FIXTURE FRAME.
4. THE PALM TREE LIGHTING FIXTURES ARE FURNISHED WITH THE DRIVER & JUNCTION BOX INSTALLED AND PREWIRED. THE CONTRACTOR IS REQUIRED TO INSTALL THE MOUNTING BRACKETS AND ATTACHED THE FIXTURE. REFER TO THE INSTALLATION INSTRUCTIONS FURNISHED.
5. REFER TO THE FIXTURE CUT SHEET TO DETERMINE THE NUMBER OF LIGHTS AIMED UP AND DOWN ON EACH PALM TREE LIGHTING FIXTURE.


1/2" SEAL TIGHT FLEXIBLE CONDUIT. VERIFY THE COLOR

1/2" CONDUIT COUPLING


CONDUIT CONNECTED TO THE POWER SOURCE

MOUNTING HEIGHT XX' NOTE 1


FINISHED GRADE

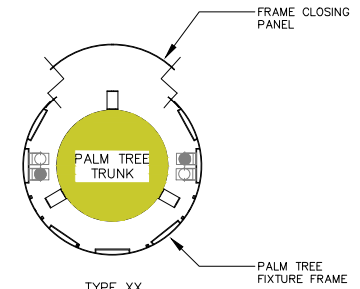

TYPE XX
2 LIGHTS UP &
2 LIGHTS DOWN
NOTE 4 & 5

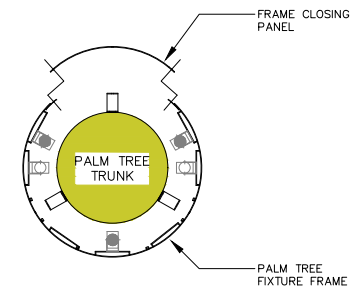

TYPE XX
2 LIGHTS UP &
3 LIGHTS DOWN
NOTE 4 & 5

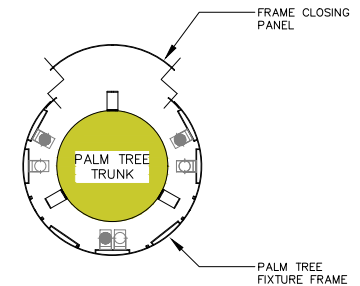

TYPE XX
3 LIGHTS UP &
3 LIGHTS DOWN
NOTE 4 & 5

BRADLEY LIGHTING
PALM TREE LIGHTING FIXTURE