




BL7066-LV LED 7W, 11W, 20W

Applications

Low voltage LED accent light with multiple beam patterns and retractable shrouds, 360° rotatable and 180° tiltable, ideally suited for accent lighting. NPT 0.5" stem connects to (existing) 12V/AC junction box or optional mounting brackets. 24V/DC input voltage available for remote driver.

Dimensions

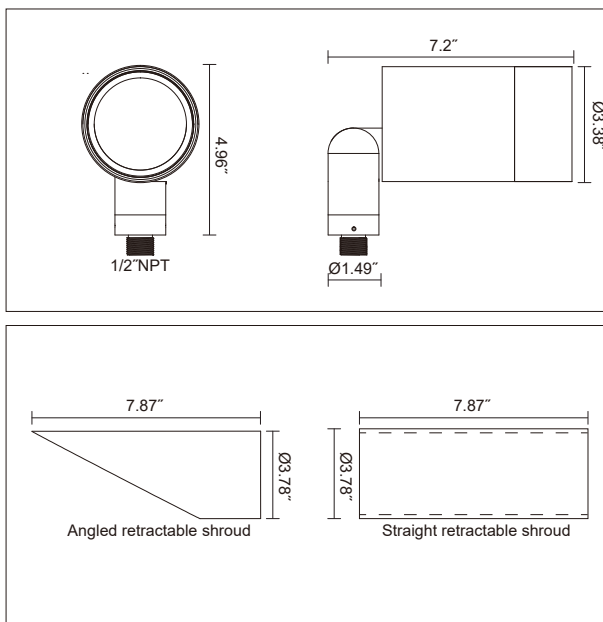

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	12V/AC, 24V/DC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications	Not ETL Listed
----------------	----------------

Options and Accessories

Shroud	 No shroud  Angled retractable shroud  Straight retractable shroud
Housing Color	 Black RAL9011  White RAL9016  Gray RAL7012  Mineral bronze  Silver RAL9006
Glareshield	 Honeycomb Louver

Mounting	See p. 12
----------	-----------

Ordering Guide:

Example: BL7066-LV - G11 - 4 - 25 - 12 - NS - B - S - H

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Input Voltage	6 Shroud	7 Housing Color	8 Accessory
BL7066-LV	C7: LED 7W ≤431lm@3KC 11: LED 11W ≤663lm@ 3K R20: LED 20W	27: 2700K 3: 3000K 4: 4000K 5: 5000K RGBW3: RGBW 3000K RGBW4: RGBW 4000K RGBW5: RGBW 5000K	10: 10° 25: 25° 35: 35° 45: 45° 4614: H46°xV14° With NS only	12: 12V/AC 24: 24V/DC	NS: No shroud AS: Angled retractable shroud SS: Straight retractable shroud	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	KB: Mounting bracket B KC: Mounting bracket C J: Junction Box R: Remote driver S: Ground stake P: Tree strap M: Marine ambient corrosion resistance PC: Pole clamp for one or two fixtures H: Honeycomb Louver RS: Retractable stem